



VHF P25 CONVENTIONAL & TRUNKED TRANSCEIVERS

IC-F9511T

Full keypad

IC-F9511S

Simple keypad

Featured for the First Responder!



512 Channels/
128 Zones

P25 Conventional
& Trunking

AES/DES
Encryption (Option)

Enhanced
Vocoder Ready

50W Output
Power

IP54
(Controller only)

Full Dot-matrix
LCD

Detachable
Controller*
*Optional RMK-2 required



DIGITAL

Photo includes optional RMK-2 and OPC-609.

*Ready for: P25 conventional,
P25 trunking and
analog conventional.
All in one radio!*



VHF P25 CONVENTIONAL & TRUNKED TRANSCEIVERS

IC-F9511T

Full keypad

IC-F9511S

Simple keypad



P25 Conventional & Trunking Features



P25 VHF Conventional and Trunking

The IC-F9511T/S has P25 VHF conventional and trunking capabilities as standard. You can assign individual channels to analog conventional, P25 conventional or P25 trunking, all within one radio.

Interoperability

The IC-F9511T/S conforms to the standard specifications for TIA/EIA TSB-102, CAAB, Digital C4FM Transceiver Performance Recommendations and provides interoperability with other brand P25 equipment for public safety applications.

Digital/Analog mixed mode operation

The mixed mode operation allows you to detect and receive both analog FM and P25 digital modes and to transmit either mode depending on programming.

Individual ID and talkgroup ID

The IC-F9511T/S has a 100 individual ID and 250 talkgroup ID memories. Use the display to visually select the person or group you're going to call.

Optional AES/DES encryption

The IC-F9511T/S provides AES and/or DES encryption for secure conversation with the optional UT-125 AES/DES encryption unit or UT-128 DES encryption unit. Versions certified to FIPS 140-2 Level 1 for AES encryption are planned for future release.

OTAR (Over-the-Air-Rekeying)

The IC-F9511T/S will support P25 OTAR in the near future.

Enhanced vocoder ready

Using the DVSI's AMBE+2™ vocoder, the IC-F9511T/S is enhanced vocoder ready.

Detachable controller (front panel)

With the optional remote control kit, RMK-2 and separation cable, the front panel controller of the radio can be detached from the main unit. It allows flexible installation in limited vehicle space. Separation cable length is selectable from 1.9m (6.2ft), 3m (9.8ft) and 8m (26.2ft).

Dot matrix, multi-function LCD

With a high contrast dot matrix display, upper and lower case characters can be easily distinguished. The display shows 12 characters by 2 lines. LCD backlight is standard.



Internal clock setting example

IP54 dust-protection and splash resistance (Controller only)

The rugged front controller panel is resistant to shock and vibration. When used with the optional separation kit, RMK-2, the controller head has dust-protection and splash resistance, equivalent to IP54.

Built-in CTCSS and DTCS signaling

Use the built-in CTCSS and DTCS encoder and decoder capabilities* to set up your own talk groups, and have your radio stand-by quietly when other groups are talking. You can also set up selective calls to individuals or control a repeater.

* Analog mode only.

512 memory channels, 128 zones

Up to 512 memory channels can be divided into 128 memory zones, allowing you flexible channel and communication group management.

Tactical group function

The tactical group function allows you to copy memory channels to the tactical zone and temporarily regroup memory channels. Using the optional zone copy cable, memory channels in the tactical zone can be transferred from a master radio to other radios.

Abundant scanning functions

The dual priority scan monitors two primary channels alternately, while scanning other channels. The mode dependent scan function automatically changes the scan list according to the operating channel setting. The talk back function with timer beep, TX channel and cancel channel settings allow you to preset the transmission channel when you push the PTT button during a scanning operation or cancel the scanning.

22W amp for Public address (PA) and RX speaker functions

The IC-F9511T/S has a built-in 22W BTL audio amplifier. When an external loud speaker is connected to the radio, you can speak through the radio's microphone. The RX speaker function allows you to relay the received audio over the loud speaker.

Programmable accessory connector

The IC-F9511T/S has a D-SUB 25-pin ACC

connector for connecting external devices. It has reserved pins for programming to input operating channels, turn on/off functions and output received audio or honk a horn, etc. In addition, an ignition sensing line allows you to control the radio power from the engine ignition switch.



Radio stun/kill and Power-on password function

The radio stun/kill function* disables a lost or stolen radio over the air, eliminating security threats from undesired listeners. The power-on password prevents unauthorized people from turning on the radio.

* P25 digital mode only.

Other features

- Wide frequency coverage (136–174MHz)
- FM wide/narrow channel spacing*¹
- Built-in audio compander*¹
- Built-in inversion type voice scrambler*¹
- Heavy duty microphone, HM-148
- NTIA VHF specification compliant
- Talk around function
- DTMF autodial*¹
- Microphone hanger action (On hook scan and off hook monitor)
- 2-Tone encoder and decoder*¹ and MDC 1200 compatible*¹ (Available in future)

*¹ Analog mode only

SPECIFICATIONS

GENERAL

- Frequency range : 136-174MHz
- Number of channels : Max. 512 channels/128 zones
- Channel spacing : 15/30kHz (analog) 12.5kHz (digital)
- PLL channel step : 2.5kHz, 3.125kHz
- Antenna impedance : 50Ω (SO-239)
- Operating Temp. range : -30°C to +60°C ; -22°F to +140°F
- Power supply requirement : 13.6V DC nominal
- Current drain (approx) :
 - Tx High (50W) 11.0A
 - Rx Max. audio 1000mA
 - Stand-by 350mA
- Dimensions (W×H×D) : 175×45×170 mm (projections not included) ; 6⁷/₈ × 1²⁹/₃₂ × 6¹/₁₆ in
- Weight (approx.) : 1.5kg; 3.3lb
 - SP-22 290g; 10.2oz

Measurements made in accordance with TIA-102 (Digital), TIA-603B (Wide/narrow). All stated specifications are subject to change without notice or obligation.

TRANSMITTER

- Output power (approx) : 50W
- Max. frequency deviation : ±5.0/2.5kHz (Wide/Narrow) Maximum pattern ±2.85kHz (Digital)
- Frequency error : ±1.0ppm
- Spurious emissions : 70dB min.
- Adjacent channel power : 70/60dB min. (Wide/Narrow) 67dB min. (Digital)
- FM hum and noise : 48/45dB typ. (Wide/Narrow)
- Audio harmonic distortion : 3% typ. (40% deviation)
- Ext. microphone impedance : 600Ω (8-pin modular)

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Humidity	507.4	-
Salt Fog	509.4	-
Dust	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Ingress Protection Standard	
Dust & Water	IP54* (Dust-protection and water resistant)

* IP54 tests were performed on the controller and RMK-2 only.

RECEIVER

- Sensitivity :
 - Analog 0.25μV typ. (at 12dB SINAD)
 - Digital 0.25μV typ. (at 5% BER)
- Squelch sensitivity : 0.25μV typ. (at threshold)
- Adjacent Ch. selectivity :
 - Analog (TIA/EIA603B) 81/53dB typ. (Wide/narrow)
 - (TIA/EIA603) 85/77dB typ. (Wide/narrow)
 - Digital 63dB typ.
- Spurious response : 85dB min.
- Intermodulation : 78dB typ.
- Hum and noise ratio : 55/51dB typ. (Wide/Narrow) 52dB typ. (Digital)
- Audio output power : 4W typ. External audio (D-sub) 22W typ. at 10% distortion with a 4Ω load
- External speaker connector : 2-conductor 3.5 (d) mm (1/8")/4Ω

Supplied Accessories

- Hand microphone, HM-148
 - DC power cable
 - Microphone hanger
 - Mounting bracket kit
 - External speaker, SP-22*
 - Key assign stickers
- * For IC-F9511T only.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

HAND MICROPHONES



- HM-152 : Regular hand microphone.
- HM-152T : DTMF microphone.
- HM-148 : Heavy duty microphone. Same as supplied.

DESKTOP MICROPHONE



Convenient for dispatching, equipped with monitor switch.

EXTERNAL SPEAKERS




- SP-5 : Large speaker for good audio quality.
- SP-22 : Compact and easy-to-install. Same as supplied with IC-F9511T.
- SP-10 : Compact mobile speaker.

SEPARATION KIT



- RMK-2 : For front panel detachment installation. Use with one of the following cables: OPC-609 (1.9m; 6.2ft), OPC-607 (3m; 9.8ft), or OPC-608 (8m; 26.2ft).

ENCRYPTION UNITS

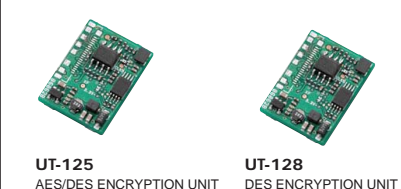

- UT-125 : Provides AES and DES encryption capabilities.
- UT-128 : Provides DES encryption capabilities. (Coming soon)

ZONE COPY CABLES

- OPC-1532 : Mobile to mobile zone copy cable.
- OPC-1871 : Mobile to handheld zone copy cable. (Coming soon)

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries. AMBE+2 is a trademark and property of Digital Voice Systems Inc. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE, Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone : +44 (0)1227 741741
Fax : +44 (0)1227 741742
E-mail : info@icomuk.co.uk
URL : <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : <http://www.asia-icom.com>

Your local distributor/dealer:

Icom Canada

Glenwood Centre #150-6165 Highway 17, Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment Himmelgeist Str. 100, D-40225 Düsseldorf, Germany
Phone : +49 (0)211 346047
Fax : +49 (0)211 333639
E-mail : info@icom-europe.com
URL : <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine, 1 Rue Brindejonc des Moulinais, BP 45804, 31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : <http://www.icom-france.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
E-mail : bjicom@bjicom.com
URL : <http://www.bjicom.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road, Clayton, VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer" Bajos A 08174, Sant Cugat del Valles, Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : <http://www.icomspain.com>

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone : +48 (58) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolska@icompolska.com.pl
URL : <http://www.icompolska.com.pl>